


## ORDERING INFORMATION

Order code: 10301  
 Description: E296T12IS120/N  
 UPC: 69549103016

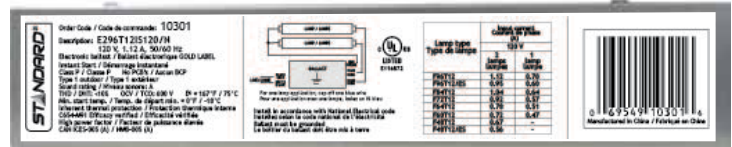

## SPECIFICATIONS

<b>Ballast type:</b>	Electronic	<b>Type</b>	1 Outdoor
<b>Starting method:</b>	Instant Start	<b>Contains PCBs:</b>	No
<b>Lamp connection:</b>	Parallel	<b>Sound rating:</b>	A
<b>Input voltage (V):</b>	120	<b>Open current voltage (OCV) (V):</b>	600
<b>Input frequency (Hz):</b>	50/60	<b>Inherent thermal protection:</b>	Yes
<b>Max. case temperature:</b>	75 °C	<b>ICES-005 Compliant:</b>	Class A RFLD
<b>Thermal protection:</b>	Class P	<b>Auto-restrike:</b>	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest	B.E.F.
<b>120 VOLTS</b>										
F96T12 (75W)	2	75	0/-18	1.12	133	0.86	10	0.99	1.7	0.65
F96T12/ES (60W)	2	60	0/-18	0.95	113	0.88	10	0.99	1.7	0.78
F84T12 (70W)	2	70	0/-18	1.04	122	0.88	10	0.98	1.7	0.72
F72T12 (57W)	2	57	0/-18	0.92	107	0.90	12	0.97	1.7	0.84
F64T12 (52W)	2	52	0/-18	0.78	93	0.90	12	0.99	1.7	0.97
F60T12 (50W)	2	50	0/-18	0.72	85	0.90	12	0.99	1.7	1.06
F48T12 (40W)	2	40	0/-18	0.67	76	0.92	15	0.95	1.7	1.21
F48T12/ES (30W)	2	30	0/-18	0.56	64	0.92	15	0.95	1.7	1.44
F96T12 (75W)	1	75	0/-18	0.70	83	1.02	10	0.99	1.7	1.23
F96T12/ES (60W)	1	60	0/-18	0.60	71	1.05	10	0.99	1.7	1.48
F84T12 (70W)	1	70	0/-18	0.64	75	1.05	10	0.98	1.7	1.40
F72T12 (57W)	1	57	0/-18	0.57	66	1.04	12	0.97	1.7	1.58
F64T12 (52W)	1	52	0/-18	0.51	60	1.03	12	0.98	1.7	1.72
F60T12 (50W)	1	50	0/-18	0.47	56	1.02	12	0.99	1.7	1.82

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

### WARRANTY:


Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. March 9, 2015

## ORDERING INFORMATION

Order code: 10301  
 Description: E296T12IS120/N  
 UPC: 69549103016

## WIRING DIAGRAM

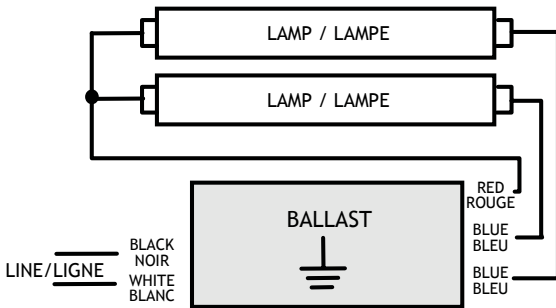


For one lamp application, cap off one blue wire  
 Pour une application avec une lampe, isolez un fil bleu

## LEADS LENGTH

Black	25" (63.5 cm)
White	25" (63.5 cm)
Blue	66" (167.6 cm)
Red	60" (152.4 cm)

## BALLAST DIMENSIONS

Length (L):	9.45" (24.0 cm)
Width (W):	1.80" (4.57 cm)
Height (H):	1.37" (3.48 cm)
Mounting (M):	8.90" (22.61 cm)

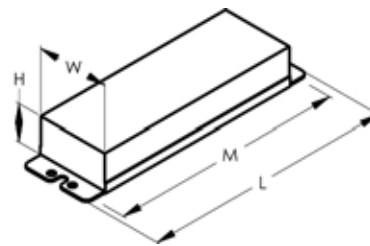

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

### WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.  
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.  
 March 9, 2015