



**Isolated ground receptacle with durable, solid construction.**

IG5262, IG5362, TRIG5362 and TRIG5262

Featuring an impact-resistant nylon face, plated steel strap, and triple-wipe brass power contacts, these receptacles are built tough. They also feature our patented screw-pressure plate back wire clamp on ground for fast installation.

**Features & Benefits**

**IG symbol and "Isolated Ground" markings** for easy I.D. and circuit delineation

**Triple-wipe brass contacts** ensure lasting, positive contact with plug blades.

**High-impact resistant nylon face** resists impacts and scrapes.


**Corrosion-resistant, plated steel strap**

**Patented feature, external screw-pressure-plate back wire clamp on ground terminal** for faster, easier installation.

**Plastic barrier isolates grounding terminal** from mounting strap and metal boxes.

**Side and internal screw-pressure-plate back wire capability** with #14 – #10 AWG copper or copper-clad, solid or stranded wire.

**Auto-ground clip** assures positive ground.

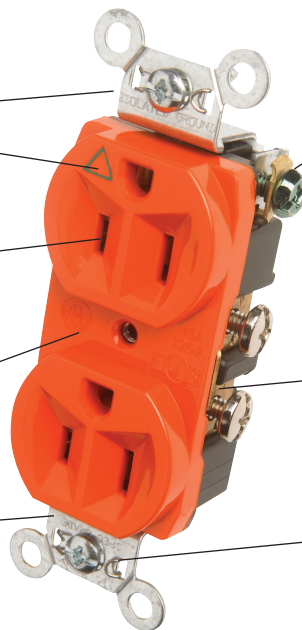

IG5262

**Vertical Markets**

- Office
- Institutional
- Retail
- Education
- Hospitality/Lodging

**3rd Party Compliance**




UL Listed, File Number E140596, Standard UL498. Fed Spec WC596. CSA Certified File Number LR16063, Standard CSA-C22.2 No. 42 General Use Receptacles. Conforms to NEMA WD-1 and WD-6.

## Technical Information

### Performance

Electrical	
Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only
Product Identification	Ratings are permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

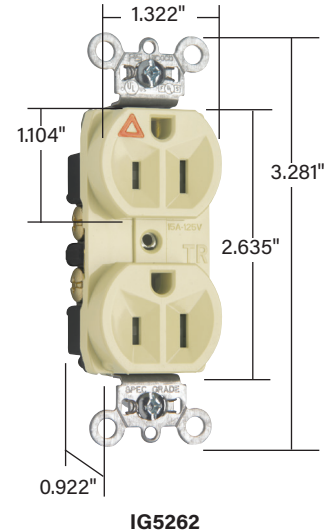

### Materials

Face	Nylon
Back Body	PVC
Line Contacts	.032 688 Brass
Mounting Strap	.042" Plated Steel
Ground Contacts	.040" 260 Brass
Pressure Plate	.080" Steel
Terminal Screws	#8 Tri-Drive Steel
Ground Screw	#8 Hex Tri-Drive Steel
Assembly Drive Screw	Plated Steel
Auto-Ground Clip	Steel
Mounting Screws	Tri-Drive Steel
Ground Wire Pressure Plate	Brass
Tamper-Resistant Shutters	Thermoplastic (for TR models)

### Warranty

1 Year

## Ordering Information

### Duplex Receptacles Back & Side Wire

Catalog Number	Ratings	Color	NEMA Config.
IG5262	15A 125V	Orange	5-15R
IG5262I	15A 125V	Ivory	5-15R
IG5262GRY	15A 125V	Gray	5-15R
IG5262RED	15A 125V	Red	5-15R
IG5262LA	15A 125V	Light Almond	5-15R
TRIG5262	15A 125V	Orange	5-15R
TRIG5262I	15A 125V	<b>Ivory</b>	5-15R
TRIG5262GRY	15A 125V	<b>Gray</b>	5-15R
TRIG5262LA	15A 125V	<b>Light Almond</b>	5-15R
TRIG5262BK	15A 125V	<b>Black</b>	5-15R
TRIG5262W	15A 125V	White	5-15R
IG5362	20A 125V	Orange	5-20R
IG5362I	20A 125V	Ivory	5-20R
IG5362W	20A 125V	White	5-20R
IG5362GRY	20A 125V	Gray	5-20R
IG5362RED	20A 125V	Red	5-20R
IG5362LA	20A 125V	Light Almond	5-20R
TRIG5362	20A 125V	Orange	5-20R
TRIG5362I	20A 125V	Ivory	5-20R
TRIG5362GRY	20A 125V	Gray	5-20R
TRIG5362RED	20A 125V	Red	5-20R
TRIG5362LA	20A 125V	Light Almond	5-20R
TRIG5362W	20A 125V	White	5-20R
TRIG5362BK	20A 125V	<b>Black</b>	5-20R




For more information on these and other P&S products refer to our Catalog or visit our web site.

---

## Also available...

- USB Charging Devices
- Hospital Grade Devices
- PlugTail® Wiring Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- SPD & Isolated Ground Devices
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)

**Canada**  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US

