


INSTALLATION INSTRUCTIONS

THESE INSTRUCTIONS MUST BE USED WITH THE CONTROL PANEL INSTALLATION MANUAL


The PC-LINK adaptor allows the installer to perform on-site downloading of supported panels quickly and easily. The PC-LINK package includes the PC-LINK adaptor, a connecting cable and a DB-09 serial connector.

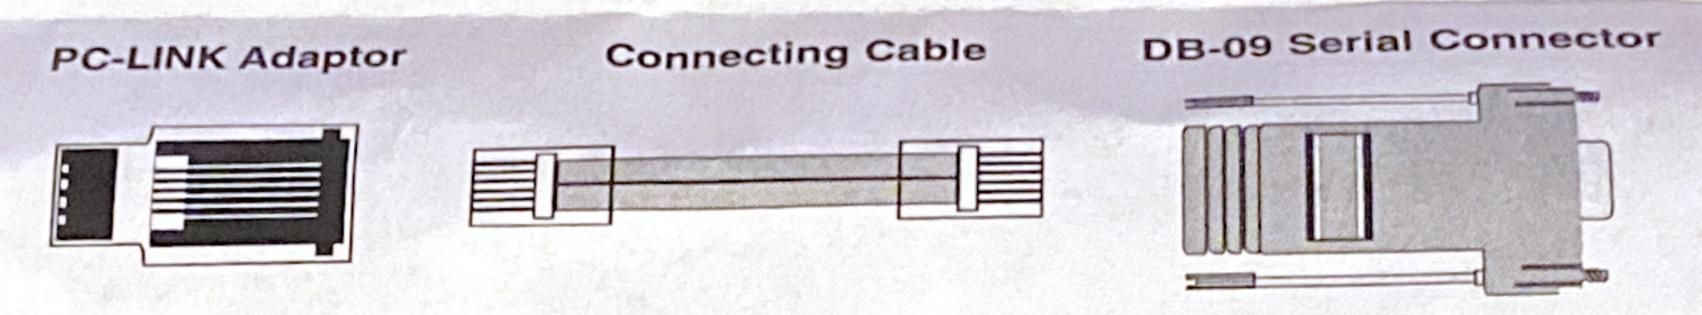

Connecting the PC-LINK

Female

Locate the PC-LINK pins on the control panel. Press the PC-LINK adaptor onto the PC-LINK pins. Be sure to align the base of the adaptor to the white line underneath the pins, as indicated in the following diagram:

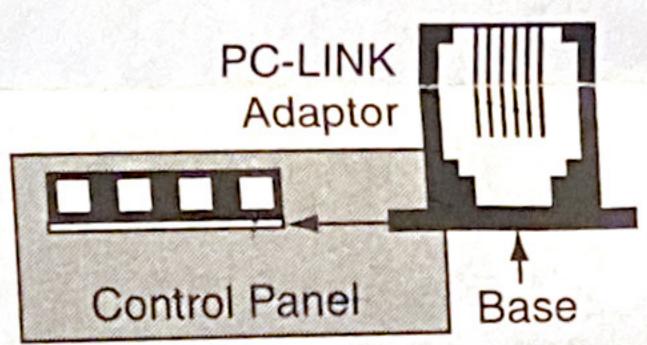

Attach the connecting cable to the PC-LINK adaptor and to the DB-09 connector. Attach the DB-09 connector to a serial port on the computer to be used for downloading.

Initiating Downloading

To initiate the download, first ensure that the computer and panel are connected in the manner described above. Verify that the version of DLS software being used supports the panel that has been connected.

To initiate the link, follow the instructions located in the panel's installation manual under the "PC-LINK" or "Downloading".

Disconnecting

To disconnect, simply terminate the session from the downloading computer or press [#] before the connection has been made. Remove the PC-LINK adaptor from the control panel.





©2005 Digital Security Controls Toronto, Canada • www.dsc.com Tech. Support: 905-760-3036, 1-800-387-3630 (Canada/US) Printed in Canada