

## DS-2CE56C5T-AVPIR3

### HD720p Outdoor Vandal-Resistant IR Dome Camera


# TurboHD™



#### Key Features

- 720p Video Output
- 2.8 mm to 12 mm Varifocal Lens
- True Day/Night
- OSD Menu, 3D DNR, Smart IR
- Up to 130 Feet IR Range
- IP66 Protection and IK10 Vandal Resistance
- UTC Function (Hikvision-C Protocol)
- 24 VAC/12 VDC

#### Dimensions

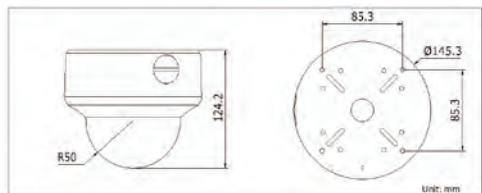

#### Accessories



Video Balun  
DS-1H18



In-Ceiling Mount  
RCM-2



Pendant Cap  
PC140

#### Order Model

DS-2CE56C5T-AVPIR3

DS-2CE56C5T-AVPIR3	
<b>Camera</b>	
Image Sensor	1.3 MP CMOS image sensor
HD-TVI Resolution	1280 x 720
Minimum Illumination	Color: 0.0014 @ f/1.4; B/W: 0 with IR
Shutter Speed	1/30 s to 1/50,000 s
Lens	2.8 mm to 12 mm @ f/1.4
	Angle of view: 78° to 28°
Lens Mount	φ14
Angle Adjustment	Pan: 0° to 355°, tilt: 0 to 80°, rotation: ±90°
Day/Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p @ 50 fps/720p @ 60 fps
HD Video Output	1 analog HD output
CVBS Output	1 Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
<b>Menu Settings</b>	
Automatic Exposure	AE/DWDR
AGC	Low/middle/high/off
Slow Shutter	Supported
White Balance	Auto/manual
D/N Mode	Color/BW/SMART IR
3D DNR	Low/middle/high/off
Motion Detection	Supported, maximum 4 zones
Privacy Mask	On/off, maximum 8 zones
UTC Function	Supported
Image Settings	Digital Wide Dynamic Range, 3D Digital Noise Reduction, sharpness, brightness, digital zoom, mirror, reset
<b>General</b>	
Operating Conditions	-20° C to 60° C (-4° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC, 24 VAC
Power Consumption	12 VDC: maximum 3.5 W 24 VAC: maximum 5 W
Weatherproof Ratings	IP66
IR Range	130 feet
Impact Protection	IEC60068-2-75 test, Eh, 20J; EN50102, up to IK10
Communication	Up-the-Coax (need UTC controller), Protocol: Hikvision-C
Dimensions	φ145.3 mm × 124.2 mm (φ5.72" × 4.89")
Weight	880 g (1.95 lbs)