

Accessories – 590 Series

HDF[®]
COMMERCIAL



RP32508 – Hardwire Transformer

Specifications

General: Supplies power for up to 10 Delta Commercial 590, 591 and 592 Series electronic units already converted to hardwire

Input Voltage: 120 VAC @ 60 Hz

Output Voltage (unloaded): 24 VAC \pm 3% @ 20 VA

Maximum Output Current: 800 mA

Operating Temperature Range: 130°C Maximum Temperature

Physical Connections: Universal Mounting Clip


Wire Size: #18 AWG

Wire Length: 11.75"

Wire Ends: Stripped (Black/White)

Terminals: Screw Type #6 Universal Pan Head

Safety Approval: UL Listed Class 2
CSA Certified
Class B Insulation System



RP32508

RP32856 – Plug-In Transformer

Specifications

General: Supplies power for up to 10 Delta Commercial 590, 591 and 592 Series electronic units already converted to hardwire

Input Voltage: 120 VAC @ 60 Hz

Output Voltage (unloaded): 24 VAC \pm 5% @ 19.2 VA


Maximum Output Current: 800 mA

Operating Temperature Range: -10°C to 40°C

Physical Connections: Plug-In Connection

Terminals: Screw Type #6 Universal Pan Head

Safety Approval: UL Listed
CSA Certified



RP32856

060683A – Hardwire Converter

Specifications

General: Converts Delta Commercial 590, 591 and 592 Series battery electronic faucets to hardwire

Input Voltage: 24 VAC @ 60 Hz

Output Voltage: 6.4 VDC \pm 5%

Maximum Output Current: 150 mA

Operating Temperature Range: -55°C to 85°C

Physical Connections: #22 AWG Stripped Primary Connection / 9 VDC Snap Secondary Connection

Wire Size: #22 AWG

Wire Length: 18.0"

Wire Ends: Strip length of wires should be 0.375" typical

061047A – Hardwire Converter with Battery Backup

General: Converts Delta Commercial 590, 591 and 592 Series battery electronic faucets to hardwire with battery backup. (See DSP-BB for detailed specification).

Specifications

Input Voltage: 24 VAC @ 60 Hz (From Transformer)

Output Voltage: 5 VDC \pm 5%

Maximum Output Current: 150 mA

Operating Temperature Range: -55°C to 85°C


Battery Backup: with 9V Battery

Physical Connections: #22 AWG Stripped Primary Connection / 9 VDC Snap Secondary Connection

Wire Size: #22 AWG

Wire Length: 12"

Wire Ends: Strip length of wires should be 0.375" typical

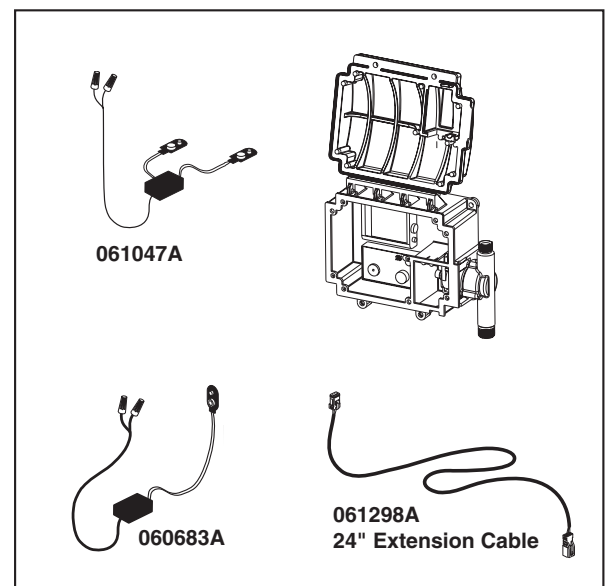

061047A

060683A

061298A
24" Extension Cable