# **Product Environmental Profile**

#### **MINIATURE CIRCUIT BREAKER 120/240V 20A**







### **General information**

Representative product

MINIATURE CIRCUIT BREAKER 120/240V 20A - HOM120

**Description of the product** 

The main purpose of the Homeline™ Miniature Circuit Breaker product range is to ensure the protection of low voltage electrical installations.

Functional unit


Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 120/240 VAC and rated current 20A In. This protection is ensured in accordance with the following parameters:


- Number of poles 1 Pole;
- Rated breaking capacity 10 kA;

## Constituent materials

Reference product mass

140 g including the product, its packaging and additional elements and accessories.

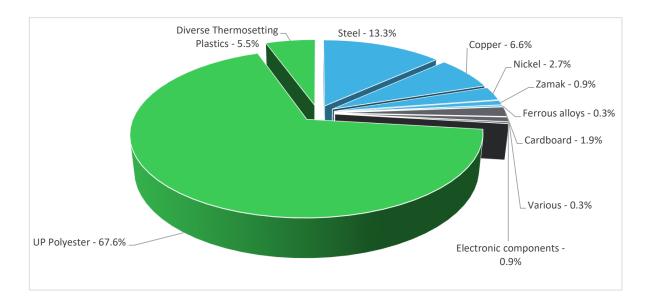



## E

## **Substance assessment**

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate – BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>




## Additional environmental information

The MINIATURE CIRCUIT BREAKER 120/240V 20A presents the following relevent environmental aspects					
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified.				
	Weight and volume of the packaging optimized, based on the European Union's packaging directive.				
Distribution	Packaging weight is 2.6 g, consisting of Cardboard(62%),Paper(38%);				
	Product distribution optimised by setting up local distribution centres.				
Installation	Ref HOM120 does not require any installation operations.				
Use	The product does not require special maintenance operations.				
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials.				
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.				
	Based on "ECO'DEEE recyclability and recoverability calculation method"  Recyclability potential: 22% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				



Reference life time	20 years					
Product category	Circuit-breakers					
Installation elements	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use scenario	Load rate: 50% of In Use time rate: 30% of RLT					
Geographical representativeness	United States of America					
Technological representativeness	The technologies represented in this assessment regards to the main purpoes of Homeline™ Miniature Circuit Breaker : ensure the protection of low voltage electrical installations.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: USA	Electricity mix AC; Europe consistent; consumption mix, at power plant; US	Electricity mix AC; Europe consistent; consumption mix, at power plant; US	Electricity mix AC; Europe consistent; consumption mix, at power plant; US		

Compulsory indicators		MINIATURE	CIRCUIT BREAK	ER 120/240V 2	20A - HOM120	)	
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3.18E-05	3.15E-05	0*	0*	2.77E-07	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2.36E-02	1.71E-03	1.61E-04	0*	2.17E-02	4.23E-05
Contribution to water eutrophication	kg PO <sub>4</sub> 3- eq	6.05E-03	2.68E-04	3.70E-05	0*	5.74E-03	1.33E-05
Contribution to global warming	kg CO <sub>2</sub> eq	2.25E+01	5.84E-01	3.57E-02	0*	2.19E+01	2.91E-02
Contribution to ozone layer depletion	kg CFC11 eq	9.78E-07	9.40E-08	0*	0*	8.83E-07	9.98E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	4.10E-03	1.96E-04	1.14E-05	0*	3.89E-03	4.29E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5.55E-02	1.72E-02	0*	0*	3.83E-02	2.12E-05
Total Primary Energy	MJ	3.95E+02	1.07E+01	5.04E-01	0*	3.83E+02	2.00E-01

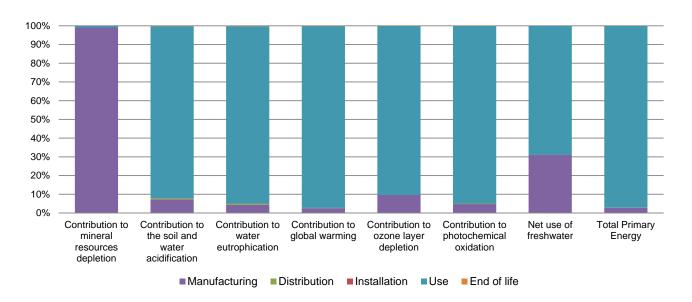

Optional indicators		MINIATURE	CIRCUIT BREAK	ER 120/240V	20A - HOM120	)	
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.90E+02	6.14E+00	5.01E-01	0*	2.83E+02	1.61E-01
Contribution to air pollution	m³	2.42E+03	1.64E+02	1.47E+00	0*	2.25E+03	1.47E+00
Contribution to water pollution	m³	1.06E+03	3.23E+01	5.86E+00	0*	1.02E+03	1.93E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3.33E-03	3.33E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.75E+00	1.00E+00	6.72E-04	0*	7.49E-01	2.20E-04
Total use of non-renewable primary energy resources	MJ	3.93E+02	9.73E+00	5.04E-01	0*	3.82E+02	1.99E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.70E+00	9.51E-01	6.72E-04	0*	7.49E-01	2.20E-04
Use of renewable primary energy resources used as raw material	MJ	5.15E-02	5.15E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.90E+02	7.01E+00	5.04E-01	0*	3.82E+02	1.99E-01
Use of non renewable primary energy resources used as raw material	MJ	2.73E+00	2.73E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.82E+00	2.83E+00	0*	0*	1.75E+00	2.40E-01
Non hazardous waste disposed	kg	3.87E+00	7.66E-01	1.27E-03	0*	3.10E+00	6.09E-04
Radioactive waste disposed	kg	1.44E-03	3.33E-04	9.02E-07	0*	1.10E-03	9.80E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4.50E-02	1.26E-02	0*	2.59E-03	0*	2.98E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5.40E-03	0*	0*	0*	0*	5.40E-03
Exported Energy	MJ	8.22E-06	7.73E-07	0*	7.45E-06	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1308001_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	12/2021	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1308001\_V2 © 2019 - Schneider Electric – All rights reserved

12/2021