

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides years of maintenance-free general illumination for residential and commercial outdoor applications such as yards, driveways, patios, loading areas and warehouses.

### CONSTRUCTION

Two tool-free adjustable heads allow for easy aiming up/down or side to side. Rugged cast aluminum, corrosion-resistant housing in bronze or white.

Clear acrylic lenses are fully gasketed to keep out moisture, dirt and bugs.

120V driver operates at 60Hz.

Rated for outdoor installations, -40°C minimum ambient.

### OPTICS

High-performance 5000K CCT LEDs produce 1096 lumens and maintain 70% of light output at 50,000 hours of service. (Nominal correlated color temperature per ANSI C78-377-2008; LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

An integrated photocell turns light on at dusk and off at dawn for energy savings and convenience.

### INSTALLATION

Mounts easily to existing junction box on wall or under building eave.

Adjustable heads allow precise illumination.

### LISTINGS

UL/C-UL Certified to US and Canadian safety standards. Wet location listed for mounting higher than 4' off the ground.

### WARRANTY

Five-year limited warranty. Full warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

NOTE: Specifications are subject to change without notice.


Actual performance may differ as a result of end-user environment and application.

Outdoor General Purpose

# OFLR 6 P

DUSK-TO-DAWN LED FLOODLIGHT  
2 ADJUSTABLE HEADS

High Performance LED

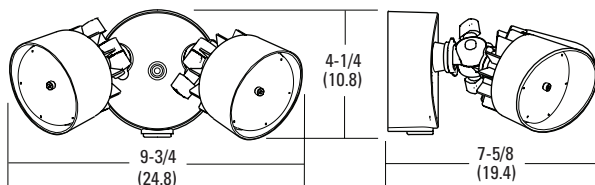

All dimensions are inches (centimeters).

### ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: OFLR 6LC 120 P BZ

| OFLR                | 6LC                 | 120           | P                        |                       |
|---------------------|---------------------|---------------|--------------------------|-----------------------|
| Series              | Number of heads     | Voltage       | Features                 | Finish                |
| OFLR LED floodlight | 6LC 6 LEDs, 2 heads | 120 120 volts | P Dusk-to-dawn photocell | BZ Bronze<br>WH White |

# 2-Head LED Floodlight with Photocell

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

