


NTN BEARING CORPORATION OF AMERICA

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com

Item # 6201LLB, Single Row Radial Ball Bearing - Double Sealed (Non-Contact Rubber Seal)

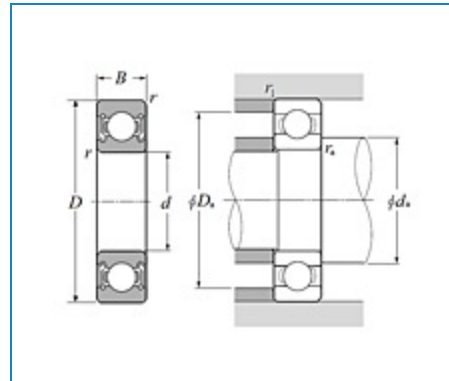
[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

Order Now

Ordering Options

[FIND A DISTRIBUTOR](#)
[CONTACT NTN CUSTOMER SUPPORT SPECIALIST](#)
[ORDER THROUGH NTN DOL \(AUTHORIZED DISTRIBUTORS ONLY\)](#)

Technical Specifications


Type

Deep Groove Ball Bearing

Bore Type	Round
Material	High Carbon Chrome Steel
Cage Type	Pressed
Cage Material	Steel
Ball Material	Steel
Limiting Speed - Grease	22000 RPM
Seal Type	Non-Contact
Seal Material	Nitrile Rubber
Precision	ISO Class 0
Configuration	One
Factor	12.7
Radial Internal Clearance	CN
Static Load Rating	620 lbf 2750 N 2.75 kN
Dynamic Load Rating	1510 lbf 6750 N 6.75 kN
Enclosure	Double Sealed
Weight	0.082 lb 0.037 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C

Dimensional Specifications





Single Row Radial Ball Bearing - Double Sealed (Non-Contact Rubber Seal) - Dimensions

d	0.4724 in 12.000 mm
D	1.2598 in 32.000 mm
B	0.3937 in 10.000 mm
r	0.0236 in 0.600 mm
r1	0.0197 in 0.500 mm
da min	0.6299 in 16.000 mm
da max	0.6693 in 17.000 mm
Da max	1.1024 in 28.000 mm
ras max	0.0236 in 0.600 mm